



Acoustical Surfaces, Inc.

SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION CONTROL SPECIALISTS

123 Columbia Court North • Suite 201 • Chaska, MN 55318

(952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121

Email: sales@acousticalsurfaces.com

Visit our Website: www.acousticalsurfaces.com


We Identify and S.T.O.P. Your Noise Problem

WHR Neoprene Hangers

WHR – Light Duty Hangers

Material are noise breaks for use with wire, chain or horizontal screws for hung ceiling applications.

TYPICAL WIRE INSTALLATION

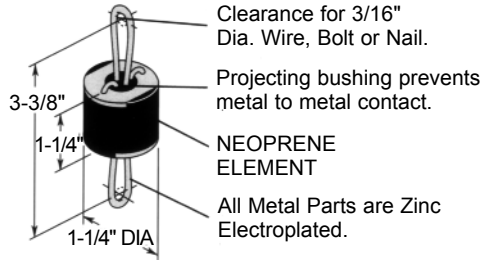

WHR Neoprene Hangers are an inexpensive but effective method of reducing noise and minor vibration transmission.

WHR HANGERS

Type & Size (Duro-meter)	Rated Capacity Range (lbs)	Rated Defl (in)	Color Mark
WHR-40	Up to 60	0.20	Green
WHR-50	55-95	0.20	Red
WHR-60	90-155	0.20	White
WHR-70	150-220	0.20	Yellow

Hanger elements have straight line deflection curves.