
ATTENTION: If you have additional questions after reviewal of this manual please contact your local ASI representative or an ASI professional at our headquarters (952)448-5300

ASI MANUFACTURES DECORATIVE ACOUSTICAL PANELS AND PRODUCTS THAT MUST BE HANDLED WITH CARE. PRODUCTS SHOULD ONLY BE INSTALLED BY EXPERIENCED INSTALLERS.

## **RECEIVING**

Prior to unpacking, check package for any obvious shipping damage. If no evidence of damage is present, move package to a dry/controlled area and inspect it for dents, breakage, or any lesser-noticeable damage that may affect enclosed panels. If damage has been identified, record it/photograph it, and open to inspect for concealed damage. If damage was transferred to the product, document/photograph the issues.

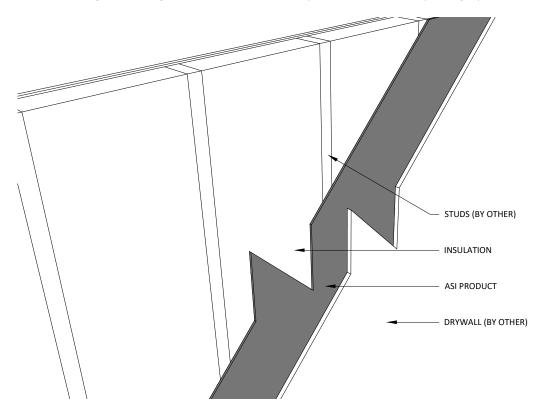

## **TOOLS**

Required:

- -Drywall screws or nails
- -Acoustical sealant

Optional:

-Wood-cutting equipment appropriate for partial panels or wall protrusion cutouts

## **INSTALLATION**

ASI product is to be installed vertically along studs prior to installation of gypsum drywall. Ensure a 1/8" (3.2mm) gap is kept between adjacent pieces. Attach ASI product to studs with one drywall screw or nail in each corner and one in the middle of the board. Fasteners must be long enough to penetrate product and stud at least 3/4" (19mm). Acoustical sealant must be placed around all edges of walls before installation of gypsum drywall. Install drywall horizontally over ASI product, being sure to avoid alignment of seams with ASI product underneath.



IN-WALL (OVER STUDS) INSTALLATION INSTRUCTIONS

SHEET NUMBER

1

SCALE: AS NOTED LAST REVISED: 3/6/2020 DRAWN BY: BH