


**Noise S.T.O.P.™**  
**B-10 Lag/QFA-3**  
**Pipe and Duct Lag**



**ACOUSTICAL**  
SURFACES INC.

# Noise S.T.O.P. B-10 Lag/QFA-3 Pipe and Duct Lag

A composite material featuring a flexible one-pound per square foot reinforced-foil faced loaded vinyl noise barrier bonded to a 1" thick quilted fiberglass sound absorber. Used to wrap noisy pipes, ducts, valves and fan housings.

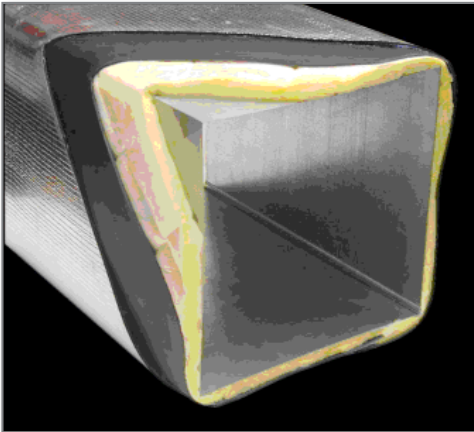

## FEATURES & BENEFITS

- Easy to cut, wrap and install with matching lag tape
- Class A Fire Rating per ASTM E-84
- Standard roll is 54" wide x 30' long

## APPLICATIONS

Typically used to wrap noisy pipes and ducts to block the noise that transmits through the walls of the pipe or duct as air or other contents move through it. The quilted fiberglass decoupler improves the performance of the noise barrier and provides sound absorption and thermal insulation around the pipe or ductwork. The reinforced foil facing on the barrier readily accepts a matching lag tape for easy installation.

## DESCRIPTION

1 lb. per square foot, foil-faced vinyl barrier bonded to a 1" thick, scrim faced quilted fiberglass absorber.

## THICKNESS

Nominal 1"

## STANDARD WIDTH

54"

## ROLL LENGTH

30'

## WEIGHT

1.2 lb/psf

## TEMPERATURE RANGE

-20° to + 220° F

## "R" FACTOR

4.0

## FLAMMABILITY

Class A Fire Rated per ASTM E84

**Test Reports & Additional Information Can be Found at:**

[https://www.acousticalsurfaces.com/hvac/duct\\_lag.htm](https://www.acousticalsurfaces.com/hvac/duct_lag.htm)

## ACOUSTICAL PERFORMANCE:

Sound Transmission Loss – ASTM E-90 & E 413							
	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	NRC
NS B-10 Lag/NS							
QFA-3	18	18	23	30	39	46	29



**ACOUSTICAL | SURFACES, INC.**

*Celebrating Over 40 Years - SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION SPECIALISTS!*

952.448.5300 | 800.448.0121 | sales@acousticalsurfaces.com | www.acousticalsurfaces.com