



# Acoustical Surfaces, Inc.

**SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION CONTROL SPECIALISTS**


123 Columbia Court North • Suite 201 • Chaska, MN 55318

(952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121

Email: [sales@acousticalsurfaces.com](mailto:sales@acousticalsurfaces.com)

Visit our Website: [www.acousticalsurfaces.com](http://www.acousticalsurfaces.com)

**We Identify and S.T.O.P. Your Noise Problem**

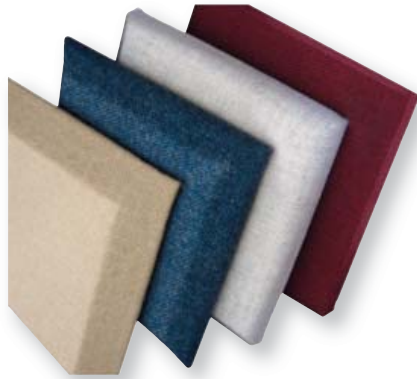

## **NOISE S.T.O.P. FABRISORB™** **Decorative Fabric Wrapped Custom Acoustical Wall Panels**

- **High Performance**
- **Architecturally Decorative**
- **Custom Engineered & Manufactured**
- **Reduced Noise & Reverberation**

**MATERIAL:** 6 lb. density glass fiber with woven fabric and microperforated vinyl facings.

**PATTERN:** Flat faced with square or radiused corners, beveled, radiused or mitered edges.

**FEATURES:** Custom designed and manufactured to meet every need. Flat or curved panels. Soft or hard edges.

**APPLICATIONS:** Offices, schools, meeting rooms, music rooms, hotels, auditoriums, recording studios, broadcasting studios. Any space where good speech privacy or speech intelligibility is important.

**THICKNESS:** 1", 1-1/8", 2", 2-1/8"    **SIZES:** 2' x 4' and a wide range of custom sizes.

**COLOR:** A wide range of standard colors and custom colors are available for woven fabrics and perforated vinyls.

**FLAMMABILITY:** ASTM E-84, Class A. Flame Spread: 15, Smoke Developed: 40.

**INSTALLATION:** Adhesive, hook & loop fasteners, mechanical clips, impaling clips, magnetic clips, splines.



**ABSORPTIVE**  
High performance absorption.



**HIGH IMPACT**  
Absorptive in high traffic areas.



**REFLECTIVE**  
For combined use in studios for absorption and reflection.



**MINERAL CORE**  
multi-purpose panel for absorption and sound blocking.



**ABUSE RESISTANT**  
For gymnasiums, absorption and abuse resistance.



**TACKABLE 1**  
For long lasting and effective tackability.



**HI-TACK**  
High absorption and tackability.



**TACKABILITY 2**  
Tackability where sound absorption is not necessary.



**NOISE BARRIER**  
Barricade vinyl barrier, ideal for areas requiring high STC.

### Edge Details



Square



Radius



Bevel



Half Bevel

### FABRISORB™ WALL PANEL: Sound Absorption Coefficients

7 PCF Glass Fiber	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	NRC
1"	.14	.27	.80	1.11	1.14	1.14	.85
2"	.22	.81	1.24	1.30	1.21	1.16	1.15

Continued on next page



# Acoustical Surfaces, Inc.

**SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION CONTROL SPECIALISTS**

123 Columbia Court North • Suite 201 • Chaska, MN 55318

(952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121


Email: [sales@acousticalsurfaces.com](mailto:sales@acousticalsurfaces.com)

Visit our Website: [www.acousticalsurfaces.com](http://www.acousticalsurfaces.com)

**We Identify and S.T.O.P. Your Noise Problem**

## Impaling Clips:

*Note:* In the pictures below, the adhesive necessary for permanent installation is not shown. Put a bead of PSA-29 panel adhesive around the perimeter of the back of the panel – approx 1/4" bead, as well as a few locations on the back of the panel that will touch the wall between the impaling clips.




1. Glue or screw impaling clip to the wall and allow to dry completely.





2. Align panel and impaling clips so that impaling clip touches the fiberglass rather than the fabric wrapped around the back of the panel.



3. Begin to press impaling clips into the back of the panel.




4. Press panel all the way onto the impaling clip so the panel is touching the wall making sure that the panel is pressed completely on to each of the impaling clips.



## Mechanical Clips (ie. E.C. Clips / E.Z. Clips)



Wall bars attaches to wall with standard screws provided by others.



The panel clip will be screwed into hardened epoxy spots on the backs of the panels.



Please note that due to the clips there will be a small space between the structure and the panel.



**Note:** If panels are being installed overhead, it is advised to use PSA29 adhesive to ensure that the clips do not slide apart.