




ACOUSTICAL
Sound Solutions for Over 35 Years

SURFACES INC.

Soundproofing | Acoustics | Noise & Vibration Control

FOAM PYRAMID PANELS

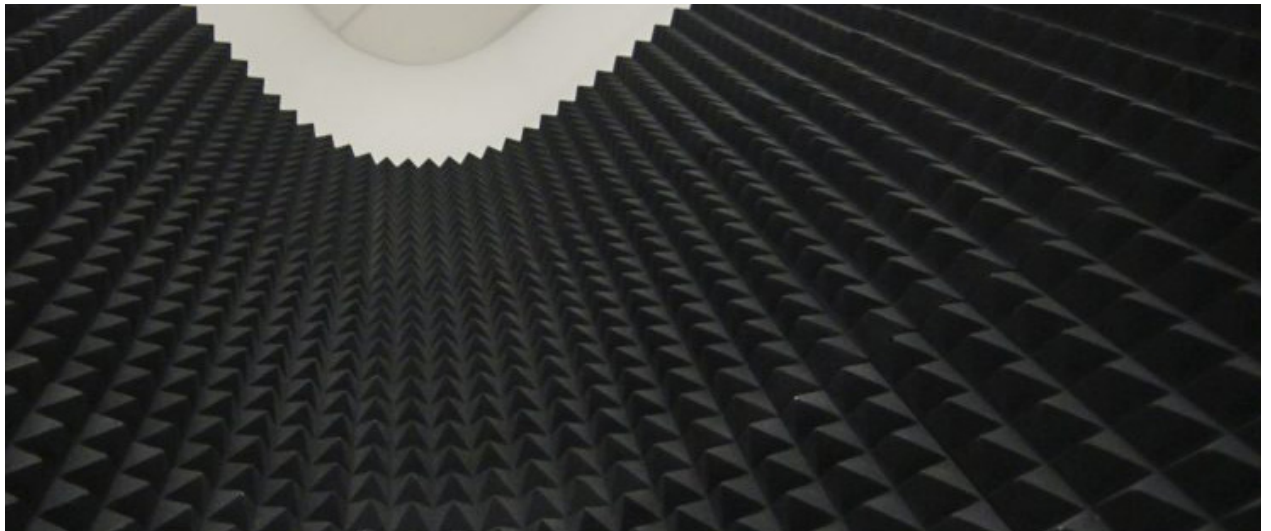

Melamine Foam Sound Absorber

- High Performance Absorber
- Increased Absorptive Surface Area
- Fiber Free
- Class A Fire Retardant

MATERIAL: Open Cell Melamine Acoustical Foam.

PATTERN: Pyramid for Monolithic Appearance.

FEATURES: Increased Surface Area, High Performance, Lightweight, Dramatic Visual Effect.

APPLICATIONS: Ceilings, Walls, Industrial, Commercial & Home Audio Markets, Broadcasting and Recording Studios.

THICKNESS: 2", 3", 4", and custom

SIZES: 2' x 2' and custom

DENSITY: Light Grey 0.56 ± 0.09 lb/ft³

White 0.47 ± 0.13 lb/ft³

COLORS: Standard: Natural White or Light Grey. Painted featuring Sherwin Williams™ catalog of 1500+ colors, plus Black, Brown, Beige, Light Gray

FLAMMABILITY: ASTM E-84, Class A. Flame Spread: 5; Smoke Developed: 50.

INSTALLATION: ASI S.T.O.P. Noise Acoustical Adhesive.



FOAM PYRAMID PANELS

Sound Absorption Coefficient

Finish	Thickness (in.)	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
White	2	0.05	0.19	0.66	0.90	1.01	1.08	0.70
	3	0.12	0.37	0.90	1.05	1.12	1.16	0.85
	4	0.24	0.50	1.06	1.15	1.21	1.19	1.00
Light Grey	2	0.08	0.22	0.68	0.88	1.0	1.05	0.70
	3	0.15	0.36	0.91	1.05	1.12	1.15	0.85
	4	0.24	0.52	1.07	1.19	1.22	1.20	1.00

