



Acoustical Surfaces, Inc.

SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION CONTROL SPECIALISTS


123 Columbia Court North • Suite 201 • Chaska, MN 55318

(952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121

Email: sales@acousticalsurfaces.com

Visit our Website: www.acousticalsurfaces.com

We Identify and S.T.O.P. Your Noise Problems

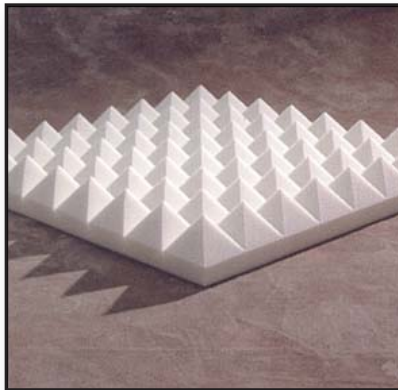

FOAM S.T.O.P. PYRAMID™

Melamine Foam Sound Absorber

- **High Performance Absorber**
- **Increased Absorptive Surface Area**
- **Fiber Free**
- **Class A Fire Retardant**

MATERIAL: Open Cell Melamine Acoustical Foam.

PATTERN: Pyramid for Monolithic Appearance.

FEATURES: Increased Surface Area, High Performance, Lightweight, Dramatic Visual Effect.

APPLICATIONS: Ceilings, Walls, Industrial, Commercial & Home Audio Markets, Broadcasting and Recording Studios.

THICKNESS: 2", 3", 4" **SIZES:** 2' x 2'. **DENSITY:** 0.7 lbs/cub. ft.

COLORS: *Standard:* Natural White or Light Grey.

Latex or HPC Paint: Black, Light Grey, Almond.

Painted: Black, Brown, Beige, Light Gray (Custom colors also available).

FLAMMABILITY: ASTM E-84, Class 1. Flame Spread: 5; Smoke Developed: 50.

INSTALLATION: ASI S.T.O.P. Noise Acoustical Adhesive. – Mechanical fasteners/screws.

FOAM S.T.O.P.: Sound Absorption/Noise Reduction per ASTM C423-90a							
B Mtg	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	NRC
2"	0.07	0.25	0.60	0.94	0.97	1.08	0.70
4"	0.18	0.44	0.96	1.14	1.18	1.19	0.95
6"	0.16	0.62	1.10	1.20	1.21	1.22	1.05

