

SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION CONTROL SPECIALISTS

123 Columbia Court North • Suite 201 • Chaska, MN 55318 (952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121

Email: <a href="mailto:sales@acousticalsurfaces.com">sales@acousticalsurfaces.com</a>
Visit our Website: <a href="mailto:www.acousticalsurfaces.com">www.acousticalsurfaces.com</a>

### We Identify and S.T.O.P. Your Noise Problems



SGS U.S. Testing Company Inc.

11341 N. 108<sup>th</sup> East Avenue Tulsa, Oklahoma 74116

# REPORT OF TEST

Test Procedure: UL 1715 – Fire Test of Interior Finish Material

Test Date: 6/24/99

Department: Engineering and Fire Technology

Prepared for: Rendered by Manufacturer for:


Acoustical Surfaces Inc.

123 Columbia Court North, Suite 201

Chaska, MN 55318











SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION CONTROL SPECIALISTS

123 Columbia Court North • Suite 201 • Chaska, MN 55318 (952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121

Email: sales@acousticalsurfaces.com Visit our Website: www.acousticalsurfaces.com

### We Identify and S.T.O.P. Your Noise Problems



SGS U.S. Testing Company Inc.

Report No.: 126659 Date: 7/6/99 Page 2 of 8

1341 North 108th. East Avenue Tulsa, OK 74116 Tel: 918-437-8333 Fax: 918-437-8487

CLIENT: Rendered by Manufacturer for

Acoustical Surfaces Inc.

123 Columbia Court North, Suite 201

Chaska, MN 55318

Attn: Stan Alexander

SUBJECT: Testing Flammability to UL 1715, Fire Test of Interior Finish Material.

SAMPLE ID: Client refers to samples received as "Sonex One". Our client Purchase Order #8824,

for reference. Twenty-four samples of 2 x 4 ft. material were used during the testing procedure. These samples were received on 6/2/99 in good condition from the client.

6/21/99 - 6/24/99. Test Dates:

PROCEDURE: UL 1715, Fire Test of Interior Finish Material. This standard provides a procedure for the

design and control of the method. This was the procedure used to generate this report and data obtained from the test. Installation of the sample was specified as by the manufacturer's instructions, using Liquid Nails Brand Adhesive - LN-910 Paneling and Molding Adhesive. No revisions of this report will be allowed after 90 days of the original

report issue.

**RESULTS:** This material "Sonex One" meets the requirements set forth by UL 1715 Fire Test of

Interior Finish Material as mentioned in Section 3, Performance, Subsections 3.2 and 3.3.

**CERTIFICATION:** The testing was performed under the complete supervision of SGS U.S Testing Company

Inc. SGS U.S. Testing Company Inc. is a recognized and accredited Testing Laboratory.

Eric Hundley, Engineer

Bk Engineering and Fire Technology Dept.

Signed for the Company

Dale E. Holloway Tulsa Branch Director

#### Member of the SGS Group

ANALYTICAL. SERVICES • PERFORMANCE TESTING STANDARDS EVALUATION • CERTIFICATION SERVICES

SGS U .S. TESTING COMPANY INC. REPORTS ARE FOR THE EXCLUSIVE USE OF THE CLIENT TO WHOM THEY ARE ADDRESSED. ANYONE RELYING ON SUCH REPORTS SHOULD UNDERSTAND ALL OF THE DETAILS OF THE ENGAGEMENT. REPORTS REFLECT RESULTS ONLY OF THE STANDARDS OR PROCEDURES IDENTIFIED TO THE TESTS CONDUCTED AND ARE LIMITED TO THE SAMPLES TESTED. TEST RESULTS MAY NOT BE INDICATIVE OF THE QUALITIES OF THE LOT FROM WHICH THE SAMPLE WAS TAXEN. SGS U.S. TESTING COMPANY INC. HAS NOT CONDUCTED ANY QUALITY CONTROL PROGRAM FOR THE CLIENT. NEITHER THE NAME. SEALS, MARKS NOR INSIGNIA OF SGS U.S. TESTING COMPANY INC. MAY BE USED IN ANY ADVERTISING OR PROMOTIONAL MATERIALS WITHOUT THE PRIOR WRITTEN APPROVAL OF SGS U.S. TESTING COMPANY INC. THIS REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL WITH.OUT THE WRITTEN PERMISSION OF THE SGS U.S. TESTING COMPANY INC. SAMPLES NOT DESTROYED IN TESTING ARE DISPOSED OF AFTER 30 DAYS.



SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION CONTROL SPECIALISTS

123 Columbia Court North • Suite 201 • Chaska, MN 55318 (952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121

Email: <a href="mailto:sales@acousticalsurfaces.com">sales@acousticalsurfaces.com</a>
Visit our Website: <a href="mailto:www.acousticalsurfaces.com">www.acousticalsurfaces.com</a>

### We Identify and S.T.O.P. Your Noise Problems




Report No.: 135052 Date: 2/14/00 Page 3 of 8

#### **RESULTS:**

#### **Temperatures**

616° F (Thermocouple #9) Maximum allowed: N/A 268° F (Thermocouple #6) Maximum allowed: N/A Maximum allowed: N/A 1644° F (Thermocouple #3) 1659° F (Thermocouple #2) Maximum allowed: N/A 498° F (Thermocouple #8) Maximum allowed: N/A Maximum allowed: N/A 642° F (Thermocouple #1) 878° F (Thermocouple #7) Maximum allowed: N/A 1 337° F (Thermocouple #5) Maximum allowed: N/A Maximum allowed: N/A 1359° F (Thermocouple #4)

## FIGURE 9.1 THERMOCOUPLE LOCATIONS

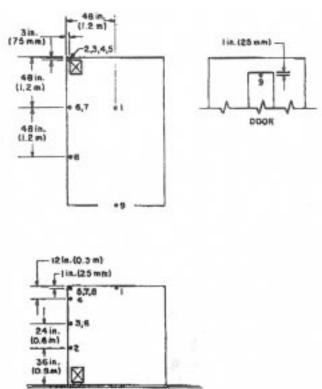

REPORT OF TEST

Soundproofing Products · Sonex™ Ceiling & Wall Panels · Sound Control Curtains · Equipment Enclosures · Acoustical Baffles & Banners · Solid Wood & Veneer Acoustical Ceiling & Wall Systems · Professional Audio Acoustics · Vibration & Damping Control · Fire Retardant Acoustics · Hearing Protection · Moisture & Impact Resistant Products · Floor Impact Noise Reduction · Sound Absorbers · Noise Barriers · Fabric Wrapped Wall Panels · Acoustical Foam (Egg Crate) · Acoustical Sealants & Adhesives · Outdoor Noise Control · Assistive Listening Devices · OSHA, FDA, ADA Compliance · On-Site Acoustical Analysis · Acoustical Design & Consulting · Large Inventory · Fast Shipment · No Project too Large or Small · Major Credit Cards Accepted



SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION CONTROL SPECIALISTS

123 Columbia Court North • Suite 201 • Chaska, MN 55318 (952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121

Email: <a href="mailto:sales@acousticalsurfaces.com">sales@acousticalsurfaces.com</a>
Visit our Website: <a href="mailto:www.acousticalsurfaces.com">www.acousticalsurfaces.com</a>

## We Identify and S.T.O.P. Your Noise Problems



Report No.: 135052 Date: 2/14/00 Page 4 of 8

#### **RESULTS:**

#### Visuals (during testing):

0:00:00 - Ignition of crib

0:00:10 - Flaming of material ceiling - Flame front did not continue to the horizontal wall and ceiling seams.

0:01:30 - White smoke generated by material covering 6 ft. level.

0:02:15 - First signs of significant charring of material.

0:03:25 - Ceiling material (above crib) penetrated by flame.

0:04:20 - Smoke significantly reduced in room (burning of material had minimized).

0:10:00 - Charring is ranging within 2 feet on both walls of the vertical corner (adjacent to the crib location).

0:10:15 - Sample shows signs of adhesion failure due to elevated temperatures.

#### Flame Spread Visuals: (See video)

Flaming nor charring did not extend to the past the sample material.

#### Measurements of Charring: (See photos 3, 4)

Flaming nor charring did not extend to the past the past the sample material.

- Along 12 ft. wall 6 ft. 3 in.
- Along 8 ft. wall 6 ft. 7 in.
- Diagonal across ceiling (from corner) 5 ft. 7 in.

Notes:

Flaming was not seen along the ceiling edges joining the wall sections. The charring of the material was viewed as an effect of the extreme temperature experienced in the test room. All measurements of charring were taken at the farthest visible charred location. The temperature estimated for charring of the material is approximately 650 °F to 700 °F.

REPORT OF TEST



123 Columbia Court North • Suite 201 • Chaska, MN 55318 (952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121


Email: sales@acousticalsurfaces.com Visit our Website: www.acousticalsurfaces.com

## We Identify and S.T.O.P. Your Noise Problems




Report No.: 135052 Date: 2/14/00 Page 5 of 8

#### Temperature Vs. Time Rendered by Manufacturer for: Acoustical Surfaces Inc. Job#: 126659

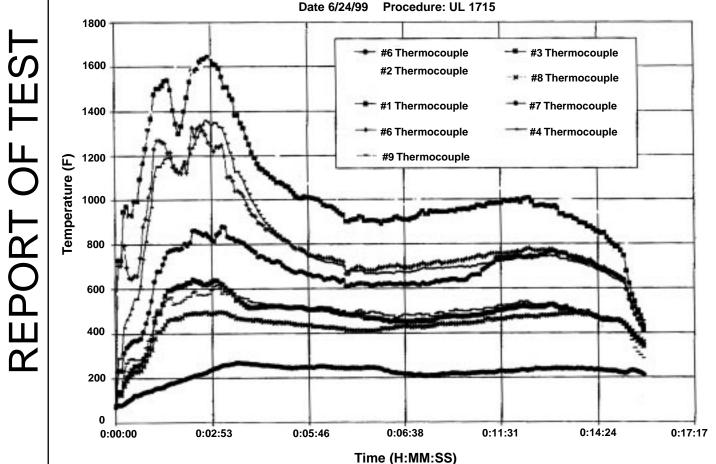

<sup>•</sup> Soundproofing Products • Sonex™ Ceiling & Wall Panels • Sound Control Curtains • Equipment Enclosures • Acoustical Baffles & Banners • Solid Wood & Veneer Acoustical Ceiling & Wall Systems Professional Audio Acoustics
 Vibration
 Damping Control
 Fire Retardant Acoustics
 Hearing Protection
 Moisture
 Impact Resistant Products
 Floor Impact Noise Reduction • Sound Absorbers • Noise Barriers • Fabric Wrapped Wall Panels • Acoustical Foam (Egg Crate) • Acoustical Sealants & Adhesives • Outdoor Noise Control • Assistive Listening Devices • OSHA, FDA, ADA Compliance • On-Site Acoustical Analysis • Acoustical Design & Consulting • Large Inventory • Fast Shipment • No Project too Large or Small • Major Credit Cards Accepted





123 Columbia Court North • Suite 201 • Chaska, MN 55318 (952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121


Email: sales@acousticalsurfaces.com Visit our Website: www.acousticalsurfaces.com

### We Identify and S.T.O.P. Your Noise Problems




**PHOTOS:** 

Report No.: 135052 Date: 2/14/00 Page 6 of 8



PHOTOS 1. Photo of Installation of 'Sonex-One'



**PHOTOS 2. Maximum Involvement of Crib** 





123 Columbia Court North • Suite 201 • Chaska, MN 55318 (952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121


Email: sales@acousticalsurfaces.com Visit our Website: www.acousticalsurfaces.com

## We Identify and S.T.O.P. Your Noise Problems


Report No.: 135052 Date: 2/14/00 Page 7 of 8



#### PHOTOS Cont'd.:

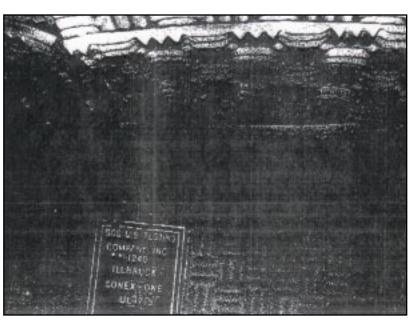

PHOTOS 3. 8 ft. Wall Charring

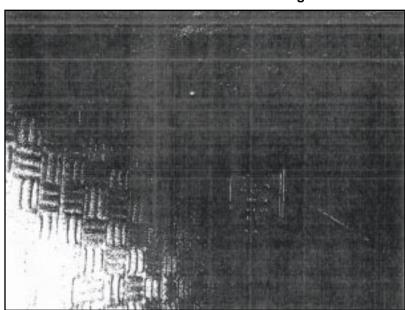

PHOTOS 4. 12 ft. Wall Charing





123 Columbia Court North • Suite 201 • Chaska, MN 55318 (952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121


Email: sales@acousticalsurfaces.com Visit our Website: www.acousticalsurfaces.com

## We Identify and S.T.O.P. Your Noise Problems

Report No.: 135052 Date: 2/14/00 Page 8 of 8



#### PHOTOS Cont'd.:

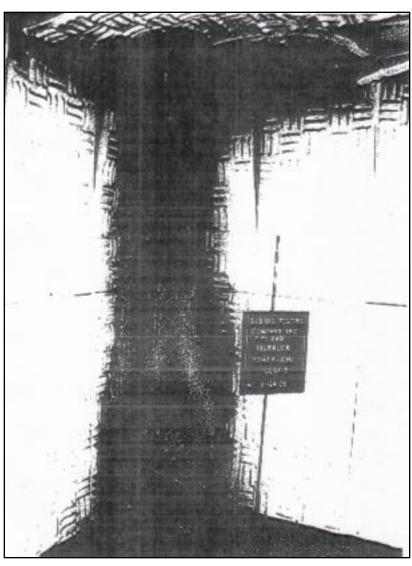

PHOTOS 6. Sonex-One after UL 1715 Fire Test