



Acoustical Surfaces, Inc.

SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION CONTROL SPECIALISTS

123 Columbia Court North • Suite 201 • Chaska, MN 55318

(952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121

Email: sales@acousticalsurfaces.com

Visit our Website: www.acousticalsurfaces.com

We Identify and S.T.O.P. Your Noise Problem

Sound Masking Loudspeakers

smartSMS

SMS-25V


The Soft dB's SMS-25V is a 25-volt system loudspeaker designed to generate the optimum masking sound for a variety of ceiling conditions. It is equipped with a 5 in. driver installed in a sealed enclosure.

It is typically installed in the plenum space, suspended between the acoustic tiles and the deck. In the case of an open ceiling, it can be attached to the structure. The SMS-25V loudspeaker can be oriented in any direction. A RoHS compliant version is also available.


Specifications

| | |
|---------------------|-----------------------|
| Power: | 10 watts |
| Sensitivity: | 91 dB |
| Material: | ABS |
| Frequency Response: | 100-8000 Hz |
| Connectors: | 5/32" screw terminals |
| Driver: | 5.5" fullrange |
| Color: | Black or White |

Dimensions

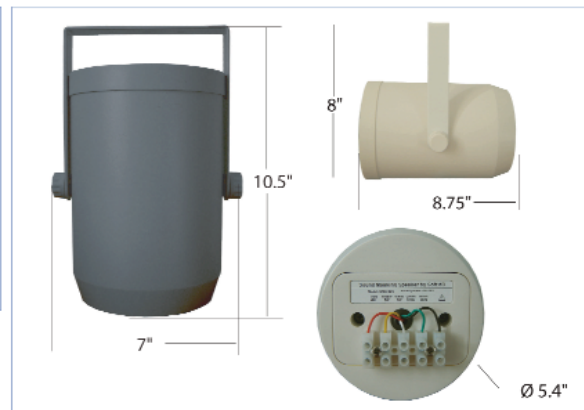

Frequency Response

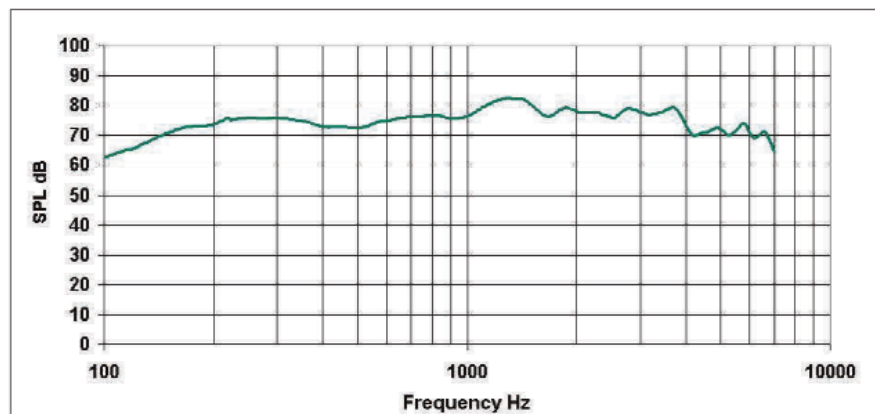

Specifications are subject to change without notice

Contact: Christian St-Pierre
 (514) 727-3800
 (514) 703-1553
c.stpierre@softdb.com

Soft dB