



# Acoustical Surfaces, Inc.

**SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION CONTROL SPECIALISTS**

123 Columbia Court North • Suite 201 • Chaska, MN 55318

(952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121

Email: [sales@acousticalsurfaces.com](mailto:sales@acousticalsurfaces.com)

Visit our Website: [www.acousticalsurfaces.com](http://www.acousticalsurfaces.com)

**We Identify and S.T.O.P. Your Noise Problem**

## SMS-FLAT Low-Profile Sound Masking Loudspeaker

smartSMS

The Soft dB's SMS-FLAT is a 25-volt system loudspeaker designed to generate the optimum sound masking spectrum in a very compact configuration. It is equipped with a dual transducer in bipole configuration.


It is used in very tight plenum space or in open ceiling. It is typically mounted directly on the deck. A rotary switch allows quick adjustment of the output level with 4W, 2W, 1W, 1/2W power available with a 25-Volt supply. The loudspeaker is also compatible with 70-Volt systems with 8W and 4W, adjustment available.

### Specifications

Power:	10 watts
Line Voltage:	25 V and 70 V
Sensitivity:	85 dB
Material:	Metal
Frequency Response:	100-8000 Hz
Connectors:	Push Terminal + Lock Screw
Driver:	Dual 2.5 x 10 cm (1 x 4 in.)
Color:	Black or White
Weight:	1.13 kg (2.5 lbs)
Shipping Weight:	1.21 kg (2.7 lbs)
Size (metric):	188 x 134 x 50 mm
Size (imperial):	7-7/16 x 5-5/16 x 2 in.



### Frequency Response

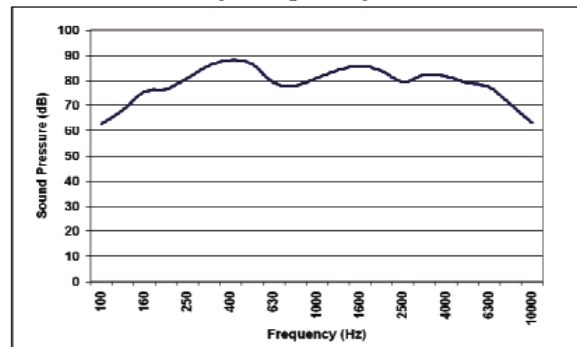

Specifications are subject to change without notice

Contact: Christian St-Pierre  
 (514) 727-3800  
 (514) 703-1553  
[c.stpierre@softdb.com](mailto:c.stpierre@softdb.com)

**Soft dB**