



# Acoustical Surfaces, Inc.

**SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION CONTROL SPECIALISTS**

123 Columbia Court North • Suite 201 • Chaska, MN 55318

(952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121

Email: [sales@acousticalsurfaces.com](mailto:sales@acousticalsurfaces.com)

Visit our Website: [www.acousticalsurfaces.com](http://www.acousticalsurfaces.com)

**We Identify and S.T.O.P. Your Noise Problem**

## NOISE S.T.O.P. ACOUSTI-BOARD™

**Sound Deadening, Sound Absorbing,  
Insulating, Low Cost**

- **Best Value!**
- **Fiberglass Free**
- **Easy to Install**



**MATERIAL:** Recycled Wood Fiber Residue

**PANEL SIZE:** 1/2" thick, 4'x8' with square edges

**DENSITY:** 15 to 20 lbs. per cubic ft.

**THICKNESS:** 1/2 Inch.

**WEIGHT:** 0.715 lbs. per square ft.

**INSULATING VALUE:** R=1.32 at 1/2" thick (ASTM C518) (\*"R" means resistance to heat flow. The higher the "R" value,

**FLAME SPREAD INDEX:** >75 Class III or C


the greater the insulating value.)

**NRC:** .35 (ASTM C423)

**STC:** 26 (ASTM E-90)

**APPLICATIONS:** Acoustical-Board can be used as a flooring underlayment or as a damping layer between studs and gypsum board to Improve sound transmission class (STC) of gypsum drywall partitions. Schools, Apartments Buildings, Townhouses, Condominiums.

**Noise S.T.O.P.  
Acousti-Board™  
Meets the  
Requirements of  
ASTM-C 208, the  
Specifications for  
Cellulosic Fiber  
Insulating Board.**

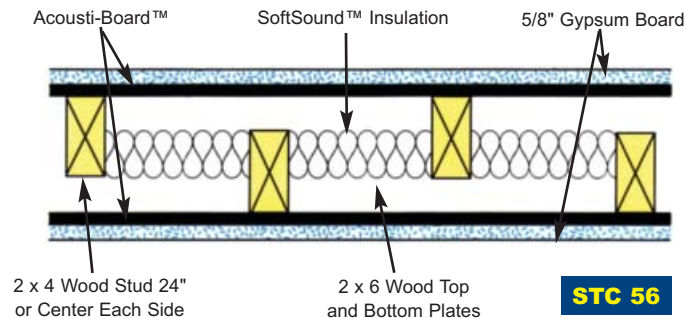

### **ACOUSTI-BOARD IS NOT FIRE RATED!**

**CAUTION:** Noise S.T.O.P. Acousti-Board™ is Combustible and May Smolder if Ignited. Do Not Expose to Flame or Prolonged Excessive Heat Above 212° F without Sufficient Thermal Protection, or Use Between Layers of Noncombustible Material.