



Acoustical Surfaces, Inc.

SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION CONTROL SPECIALISTS


123 Columbia Court North • Suite 201 • Chaska, MN 55318

(952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121

Email: sales@acousticalsurfaces.com

Visit our Website: www.acousticalsurfaces.com

We Identify and S.T.O.P. Your Noise Problem

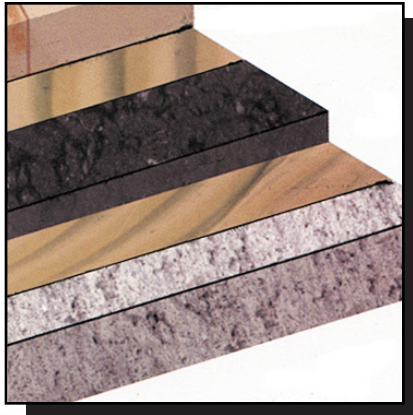


ACOUSTIK™
acoustic subflooring

- **High Performance Noise Control**
- **Cost Effective**
- **Recycled Rubber Material**
- **Easy to Install and Work with**




- MATERIAL:** Recycled Rubber
- FEATURES:** Flat, semi-smooth
- APPLICATIONS:** Effective Sound Control
- ROLL SIZE:** 4' x 25' – Sold in full rolls
- THICKNESS:** 1/4", 3/8", 1/2"
- COLOR:** Black
- FLAMMABILITY:** ASTM E-84 Flame Spread: 83; Smoke Developed: 315
- INSTALLATION:** Adhesive Poly 300 or DA5



- COMPOSITION:**
- Wood Floor
 - Adhesive
 - 8-mm (5/16") Acoustik Membrane
 - Adhesive
 - Concrete slab (8")

FIIC 62



COMPOSITION:

- Wood Floor
- Adhesive
- 8-mm (5/16") Acoustik Membrane
- Adhesive
- 38-mm Concrete Slab
- 11.1-mm (7/16") Particleboard
- 38 x 235-mm (2" x 10") Floor Joist
- RSI 1.470-mm (2-3/4") Sound Insulation

FIIC 61

The 25 year limited warranty is offered by Tuile Duro Inc. Acoustik is warranted against degradation of the physical properties of the products rubber material when installed in accordance with the manufacturers installation instructions. The limited warranty covers replacement of the Acoustik product only, labor, materials and other cost to repair and replace floor components are not warranted. No other warranty is either expressed or implied. All liability associated with the use of Acoustik is assumed by Tuile Duro Inc.