



Acoustical Surfaces, Inc.


SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION CONTROL SPECIALISTS

123 Columbia Court North • Suite 201 • Chaska, MN 55318
(952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121

Email: sales@acousticalsurfaces.com

Visit our Website: www.acousticalsurfaces.com

We Identify and S.T.O.P. Your Noise Problem

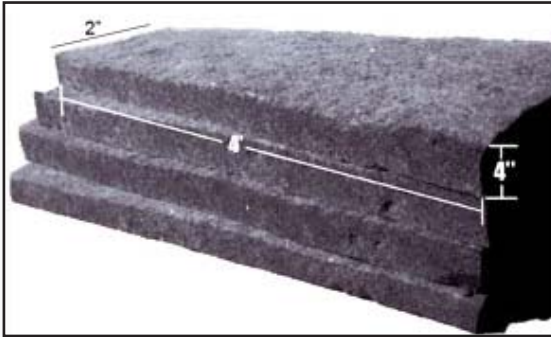

BAC – BASS BUSTER

Low Frequency Sound Absorber

- *Low Frequency High Performance*
- *Durable*
- *User Friendly*
- *Eligible for LEED™ Credits*

MATERIAL: 1.5 lb. density, recycled bonded acoustical cotton fiber.

FEATURES: Exceptionally good low frequency absorption. Ideal behind acoustical fabric, perforated or slotted panel surfaces.

APPLICATIONS: Industrial, architectural or pro audio applications. Machinery and mechanical rooms. For harsh noisy environments that require high performance, low frequency noise reduction. Above acoustical ceiling grid systems. User friendly alternative to glass fiber insulations.

THICKNESS: 4"

SIZES: 2' × 4' (Special sizes available upon request based on minimum quantities).

COLOR: Gray.

FLAMMABILITY: ASTM E84, Class A. Flame Spread: 23.

INSTALLATION: Adhesive, mechanical clips, friction fit.

BAC – Bass Buster – Noise Reduction Coefficient							
Frequency	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	NRC
4"	0.97	1.37	1.23	1.05	1.00	1.01	1.15

