




# Acoustical Surfaces, Inc.

Soundproofing, Acoustics, Noise & Vibration Control Specialists

123 Columbia Court North • Suite 201 • Chaska, MN 55318  
(952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121

Email: [sales@acousticalsurfaces.com](mailto:sales@acousticalsurfaces.com)  
Visit our Website: [www.acousticalsurfaces.com](http://www.acousticalsurfaces.com)

We Identify and **S.T.O.P.** Your Noise Problems

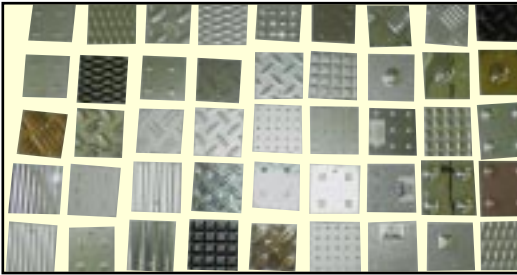

Call 1-800-448-0121 for Custom Quote.

## COLLECTIONS:

There Are Four Separate  
Collections Available:

- Classic • Old World • Contemporary
- Two Tone

**NRC Ratings to 1.05**

## Noise S.T.O.P.™ MIRROFLEX™ PERFORATED METAL LOOK CEILINGS

Affordable Options to Metal Ceilings  
and Walls

- ✓ **Interlocking Panel Design**
- ✓ **Glues Up With Ease (No Nails Necessary)**
- ✓ **Can Be Cut to Size Simply with Scissors or Razor Knife.**
- ✓ **A Large Palette of Color Options**
- ✓ **Inexpensive Paintable Grade**
- ✓ **Ultra Lightweight Grade, High Impact Resistant**

**FEATURES:** MirroFlex™ is a decorated and perforated thermoplastic wall or ceiling tile usually supplied with pressure sensitive adhesive backing for ease of installation. 2' x 4' or 2' x 2' panels .040 (1mm thick) UPS shippable. Many woodgrain, granites and specialty finishes available. MirroFlex™ has good chemical resistance, and is abrasion resistant. Gives an economical metal look ceiling or wall that can have superior sound absorbing quality when Echo Eliminator™ or Sound Silencer™ is used as a backer.

MirroFlex™ structures are composite thermal plastic fire-retardant material with embossed designs and thermally infused color added for effect. We offer large array of color options and combinations to meet almost every design need.

**SIZE:** Perforated or non-perforated custom sizes available

**COLOR:** Many woodgrain, granites and specialty finishes available.  
Call 1-800-448-0121 for information.

**CARE:** Protect with any auto polish to increase wear resistance. Clean only with soapy water. Never use abrasive cleaners.

**FLAMMABILITY:** Fire Retardant passes Class 1 ASTM E84 and UL VO94 tests.

**INSTALLATION:** All MirroFlex™ ceiling tiles for lay-in application with grid systems required the weight of an old or new mineral fiber type ceiling tile (standard tiles) on top to hold them firmly in place. Also 2' x 4' (600 x 1200mm) lay-in tiles can produce 1/2" (13mm) of sag unless supplemental adhesive is used.