



Acoustical Surfaces, Inc.

SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION CONTROL SPECIALISTS

123 Columbia Court North • Suite 201 • Chaska, MN 55318

(952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121

Email: sales@acousticalsurfaces.com

Visit our Website: www.acousticalsurfaces.com

We Identify and S.T.O.P. Your Noise Problems



SONEX Mini™

Melamine Foam Acoustical Panels

- **Fiber Free**
- **Class A Fire Retardant**
- **Lightweight**
- **Reduces Reflective Noise & Reverberation**

MATERIAL: Melamine Acoustical Foam.
PATTERN: Convoluted for maximum handling of high frequency sound waves.
FEATURES: Designed for use in environments where high frequency noise control is required.

APPLICATIONS: Suitable for a variety of applications in environments requiring noise control solutions, schools, manufacturing plants, broadcasting studios, restaurants, and offices.

SIZE: 1", 1½".

DENSITY: 2'x 4'.

THICKNESS: 0.7 lbs./cub. ft.

STANDARD COLORS: White, Grey.


OPTIONAL HPC-COATED COLORS: Black, Light Grey, White, Almond, Medium Grey, Light Blue, Ivory.

CUSTOM COLORS: *Please contact us to discuss custom color options.*

FLAME SPREAD per ASTM E84: Class A. Natural: 5; Painted: 10.

SMOKE DENSITY per ASTM E84: Class A. Natural: 50; Painted: 10.

INSTALLATION: ASI S.T.O.P. Noise Acoustical Adhesive.

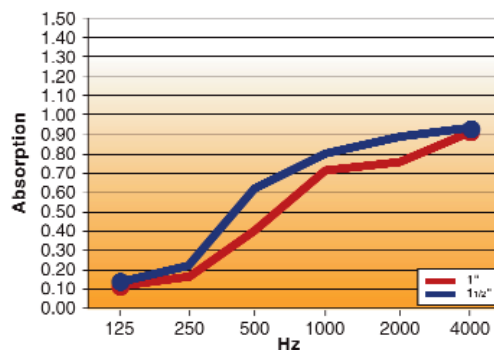

Sound Absorption per ASTM C-423-902

	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	NRC
1" Thick Natural	0.11	0.17	0.40	0.72	0.79	0.91	0.50
1½" Thick Natural	0.14	0.21	0.61	0.80	0.89	0.92	0.65