



Acoustical Surfaces, Inc.

SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION CONTROL SPECIALISTS

123 Columbia Court North • Suite 201 • Chaska, MN 55318

(952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121


Email: sales@acousticalsurfaces.com

Visit our Website: www.acousticalsurfaces.com

We Identify and S.T.O.P. Your Noise Problems

SONEX Valueline™

Melamine Foam Acoustical Baffles

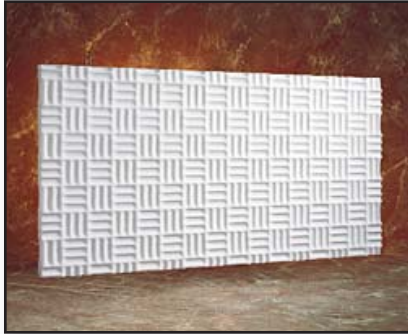

- **Fiber Free**
- **High Performance Sound Absorbers**
- **Lightweight**
- **Low Cost**
- **Reduces Reflected Noise & Reverberation**

MATERIAL: Melamine Acoustical Foam.

PATTERN: Shallow control surface.

FEATURES: Lightweight - Acoustically effective to reduce reflected noise and reverberation.

APPLICATIONS: Manufacturing plants, warehouses, auditoriums, gymnasiums, sports centers, lunchrooms.

THICKNESS: 2".

SIZES: 2' x 4'.

DENSITY: 0.7 lbs./cub. ft.

STANDARD COLORS: White, Grey, Charcoal.

OPTIONAL HPC-COATED

COLORS: Black, Light Grey, White, Almond, Medium Grey, Light Blue, Ivory.

CUSTOM COLORS: Please contact us to discuss custom color options.

FLAME SPREAD per ASTM E84: Class A. Natural: 5; HPC-Coated: 15; Painted: 45.

SMOKE DENSITY per ASTM E84: Class A. Natural: 50; HPC-Coated: 150; Painted: 10.

INSTALLATION: Stainless steel corkscrew hangers.



Sonex Valueline Baffles – Sabins per Baffle (Test ASTM C423-90a)

Thickness	Finish	25Hz	250Hz	500Hz	1KHz	2KHz	4KHz	Avg.
2"	Natural	1.0	5.4	10.8	16.3	18.7	24.0	12.7
2"	HPC-Coated	2.3	6.5	12.7	19.7	21.0	21.0	15.0