




Acoustical Surfaces, Inc.

Soundproofing, Acoustics, Noise & Vibration Control Specialists

123 Columbia Court North • Suite 201 • Chaska, MN 55318
(952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121

Email: sales@acousticalsurfaces.com
Visit our Website: www.acousticalsurfaces.com

We Identify and **S.T.O.P.** Your Noise Problems

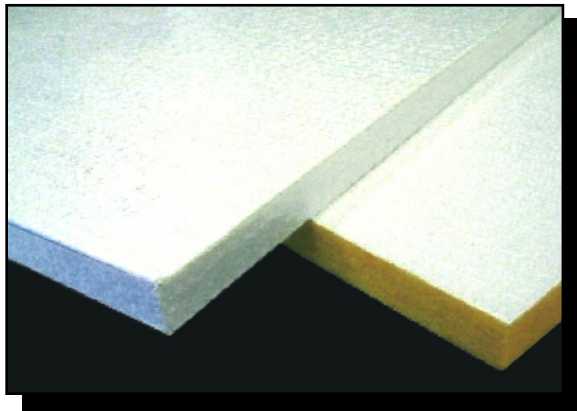

Noise S.T.O.P.™ ULTRA-SAN SANITARY CEILING & WALL PANELS

- ✓ **Superior Acoustics**
- ✓ **Approved for Demanding Clean Room Requirements**
- ✓ **Cleanable/Washable**

Noise S.T.O.P.™ Ultra-Tile Clean Room Ceiling Tiles offer superior acoustics while meeting demanding clean room requirements. Noise S.T.O.P.™ Ultra-Tiles are available in either faced only model or completely encapsulated model. The mil reinforced white mylar is USDA & FDA approved for clean room applications.

MATERIAL: 6-7# PCF rigid fiberglass core. **FINISHES:** 1 mil reinforced white mylar.

APPLICATIONS: Typical uses include food processing plants, veterinary clinics, cafeterias and kitchen areas, restaurants.

SIZE: Standard sizes of 2' x 2' or 2' x 4'.

THICKNESS: 1" or 2".

INSTALLATION: Easily installed with a 15/16" grid – wall mounted.

FACING OPTIONS: Faced 1 side only. Faced + wrapped edges completely encapsulated.

FLAMMABILITY: ASTM E-84 Class 1-A Nonflammable components. Flame Spread: 25, Smoke Developed: 50

SUBSTRATE: 6-7# PCF rigid fiberglass core.
MOUNTING: Grid supplied by others.
FINISHES: 1 mil reinforced white mylar.
EDGE DETAIL: Square.
WEIGHTS: .5 lbs. S.F. – 1". 1.0 lbs. S.F. – 2".
ACOUSTICAL: NRC Rating: 1".....0.85, 2"1.15.