



Acoustical Surfaces, Inc.

SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION CONTROL SPECIALISTS

123 Columbia Court North • Suite 201 • Chaska, MN 55318

(952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121

Email: sales@acousticalsurfaces.com

Visit our Website: www.acousticalsurfaces.com

We Identify and **S.T.O.P.** Your Noise Problems

NOISE BARRIER/SOUND ABSORBER
COMPOSITE

SPEC DATA SHEET


BBC-SERIES

NOISE BARRIERS/SOUND ABSORBER COMPOSITES

BBC-13X-2" Sound Curtains

Acoustical Surfaces BBC-13X-2" offers the benefits of both a noise barrier and a sound absorber for outdoor applications. This product consists of a two-inch thick vinyl-coated-fiberglass-cloth faced quilted fiberglass that is bonded to a one-pound per sq. ft. reinforced loaded vinyl noise barrier. "X" style Sound Curtain panels are constructed with grommets across the top and **bottom, and exterior grade** Velcro seals along the vertical edges. The product is also available in roll form with edges bound or unbound.

- Class A (or 1) flammability rated per ASTM E- 84
- For Indoor or Outdoor Applications
- Available facing colors on quilt: gray, tan, black or off-white
- Available barrier colors: gray, tan, blue or olive drab

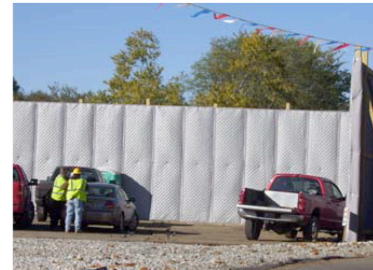

Applications:

With its 3-5 year life span* in the harshest environments, this product is typically used as a **temporary noise barrier on outdoor applications such as construction site noise mitigation projects.** Also available with a two-pound psf noise barrier or a one-inch thick quilted fiberglass sound absorber.

Product Data:

Description	Vinyl coated fiberglass cloth facing on 2" quilted fiberglass/ 1 lb-psf reinforced loaded vinyl noise barrier
Flammability	Flame Spread: 23.0 Smoke density: 30.0
Nominal thickness	2.0 inches
Temperature range	-20° to +180° F
Standard roll size	54" wide x 25' long
Weight	1.45 lb psf

Acoustical Performance:

Sound Transmission Loss

Product	OCTAVE BAND FREQUENCIES (Hz)						STC
	125	250	500	1000	2000	4000	
BBC-13X-2"	13	20	29	40	50	55	32

ASTM E-90 & E 413

Sound Absorption Data

Product	OCTAVE BAND FREQUENCIES (Hz)						NRC
	125	250	500	1000	2000	4000	
BBC-13X-2"	.07	.27	.96	1.13	1.08	.99	.85

ASTM C 423

* when properly installed.