



Acoustical Surfaces, Inc.

SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION CONTROL SPECIALISTS


123 Columbia Court North • Suite 201 • Chaska, MN 55318

(952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121

Email: sales@acousticalsurfaces.com

Visit our Website: www.acousticalsurfaces.com

We Identify and S.T.O.P. Your Noise Problems

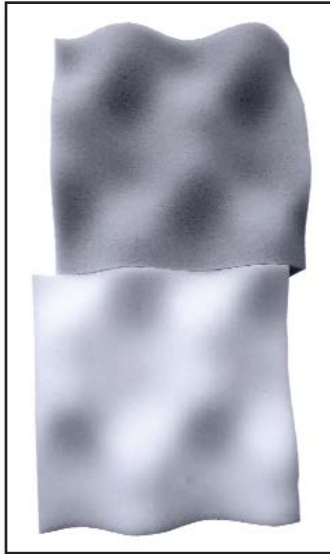

FOAM S.T.O.P. SOUNDWAVE™

Melamine Foam Sound Absorber

- **Class A Fire Retardant**
- **High Performance Sound Absorber**
- **Sound Wave Pattern**
- **Fiber Free**

MATERIAL: Open Cell Melamine Acoustical Foam.

PATTERN: Convoluted Double Hump Anechoic Wedges. Sonex™ Pattern Also Available.

FEATURES: Designed For Sound Absorption in a Wide Range of Frequencies. Increased Surface Absorption Area.

APPLICATIONS: Industrial, Commercial, Audio, OEM Residential Markets, Ceilings, Walls, Partitions, Sound/Recording Studios, Radio Stations, Board Rooms, Swimming Pools, Churches, Schools, Gun Ranges, Enclosures.

THICKNESS: 1", 2", 3", 4". **SIZES:** 2' x 2', 2' x 4' **DENSITY:** 0.7 lbs./cub. ft.


COLORS: *Standard:* Natural White or Light Grey.

Latex or HPC Paint: Black, Light Grey, Almond.

Painted: Black, Brown, Beige, Light Gray (Custom colors also available).

FLAMMABILITY: ASTM E84, Class A. Flame Spread: 6; Smoke Developed: 15.

INSTALLATION: ASI S.T.O.P Noise Acoustical Adhesive.

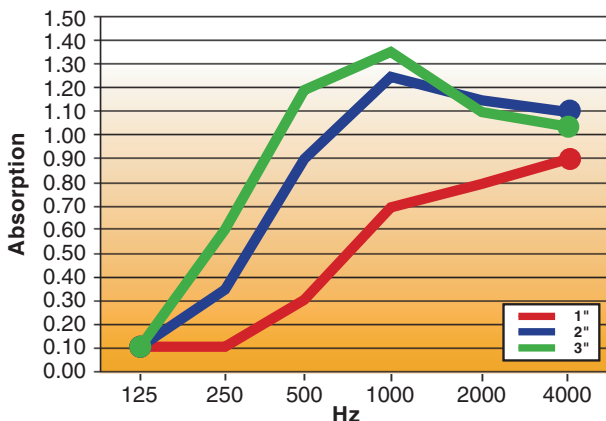

FOAM S.T.O.P. Dualwave: Sound Absorption / Noise Reduction

	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	NRC
1"	0.10	0.10	0.30	0.70	0.80	0.90	0.60
2"	0.10	0.35	0.90	1.25	1.15	1.10	1.00
3"	0.10	0.60	1.20	1.35	1.10	1.05	1.15
4"	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Available with Hypalon Washable Finish

Available as Hanging Acoustical Baffles