



Acoustical Surfaces, Inc.

SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION CONTROL SPECIALISTS

123 Columbia Court North • Suite 201 • Chaska, MN 55318

(952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121

Email: sales@acousticalsurfaces.com

Visit our Website: www.acousticalsurfaces.com

We Identify and S.T.O.P. Your Noise Problem

Acoustical Surfaces, Inc.
A Master Distributor for
PAC INTERNATIONAL, INC.



RSIC-WHI Wire Hanging Isolator

Wire Hanger Isolator

The Sound of Silence

RSIC-WHI Wire Hanger Isolator

The RSIC-WHI is designed for use with any wood, steel, or concrete application where a dropped drywall ceiling is required. The RSIC-WHI isolator installs mid-wire between the structure and a drywall grid ceiling, or CRC and hat channel ceiling. The RSIC-WHI Isolator has four acoustical design load ratings, supporting weights up to 220 lbs per isolator.

APPLICATIONS: Wood, Steel, Metal deck, Concrete, Apartment, Condo, Commercial, Retail, Recording Studio, Home Theater, Commercial Theater, Conference rooms

ACOUSTICAL DESIGN LOAD: 35 to 220 lbs. per isolator

TOTAL DEFLECTION: 3 mm

LOW VOC TREATED: Yes

ADJUSTABLE: Wire

CAVITY MIN: 3"

CAVITY MAX: No limit

ADJUSTMENT LIMIT: Wire length

USE ON CEILINGS: Yes

USE ON WALLS: No

NEW CONSTRUCTION: Yes

RETRO FIT: Yes

MAXIMUM SPACING: 48" x 48" OC



Continued on next page...



Acoustical Surfaces, Inc.

SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION CONTROL SPECIALISTS

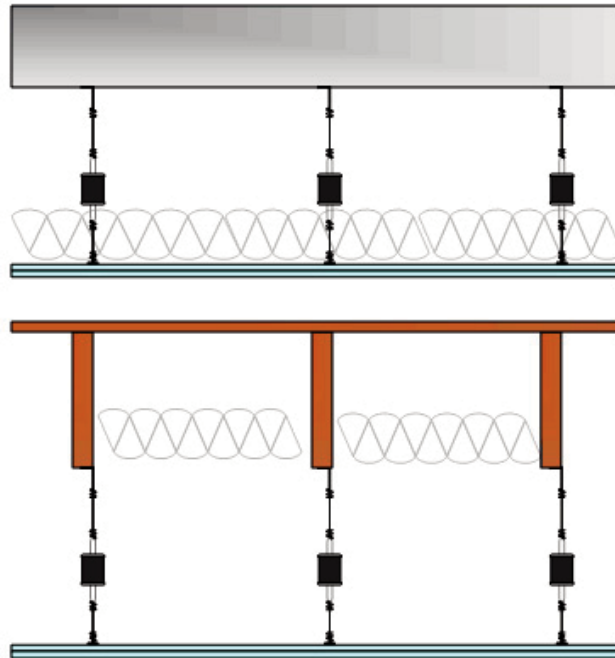
123 Columbia Court North • Suite 201 • Chaska, MN 55318



(952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121

Email: sales@acousticalsurfaces.com

Visit our Website: www.acousticalsurfaces.com

We Identify and S.T.O.P. Your Noise Problem



RSIC-WHI Design Load Rating	
Green – 70lb	Red – 100lb
	
White – 145lb	Yellow – 220lb
