



Acoustical Surfaces, Inc.

SOUNDPROOFING, ACOUSTICS, NOISE & VIBRATION CONTROL SPECIALISTS

123 Columbia Court North • Suite 201 • Chaska, MN 55318

(952) 448-5300 • Fax (952) 448-2613 • (800) 448-0121

Email: sales@acousticalsurfaces.com

Visit our Website: www.acousticalsurfaces.com

We Identify and S.T.O.P. Your Noise Problem



Whiteline™ Acoustical Panels

- *Lightweight*
- *Economical*
- *High Performance*

MATERIAL: Open Cell Melamine Acoustical Foam

PATTERN: Flat

FEATURES: Lightweight, economical, high light reflectance.

APPLICATIONS: Office Buildings, Schools, Churches, Warehouses, Conference Rooms, Entries, Lobbies

THICKNESS: 0.6" **SIZES:** 0.6" - 2' x 2', 2' x 4'

COLOR: White (Other colors available upon request)

FLAMMABILITY: ASTM E-84, Class A


INSTALLATION: 15/16" or 9/16" T-Grid System

SONEXwhiteline™: Sound Absorption / Noise Reduction

	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	NRC
0.6" Thick	0.27	0.60	0.64	0.80	0.91	1.02	0.75



**LIGHTING FIXTURE
ACCESSORY
AVAILABLE**

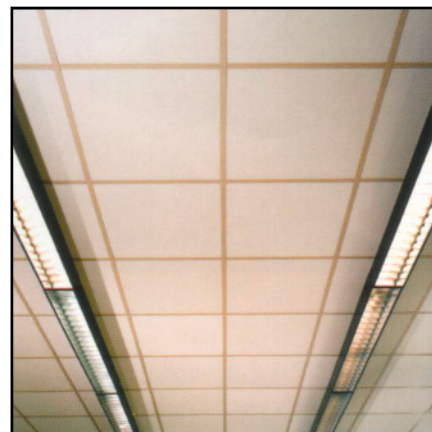

9/16" T-Grid System